

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 202 532 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **H04M 1/02**(21) Application number: **01125655.9**(22) Date of filing: **26.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Hyun, Sang-Min**
Suwon-city, Kyungki-do (KR)

(74) Representative: **Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**


(30) Priority: **26.10.2000 KR 2000063112**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
Suwon-City, Kyungki-do (KR)

(54) **Portable, foldable data input device with conical hinge means for use in a mobile communication terminal**

(57) A portable, foldable data input device for use with a mobile communication terminal. The data input device includes a first housing having an edge defining a first slope; a second housing having an edge defining a second slope facing the first slope when the first and second housings are unfolded; and conical hinge

means situated between the first and second housings, for coupling the first housing to the second housing. The conical hinge means comprises first and second side hinge arms facing each other, mounted on the first housing; and a center hinge arm coaxially interposed between the first and second side hinge arms, the center hinge arm being mounted on the second housing.

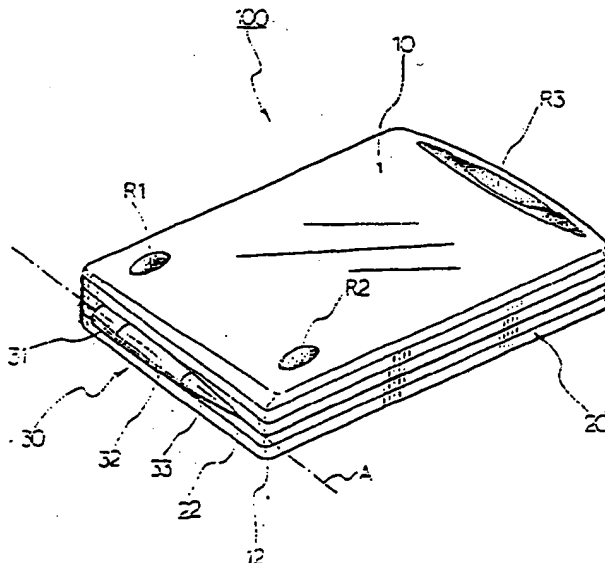**FIG. 1**

Description

[0001] The present invention relates generally to a data input device for use in a mobile communication terminal such as a mobile phone, and in particular, to a portable, foldable data input device with conical hinge means.

[0002] A keyboard with a plurality of alphanumeric key buttons is typically used as a data input device. In general, the keyboard is connected to a personal computer and used as a data input device. The keyboard includes a plurality of alphanumeric key buttons mounted thereon and generates key data according to depression of the key buttons by the user.

[0003] Meanwhile, a mobile communication terminal such as a mobile phone has a keypad or a touch screen as a data input device. The keypad includes a plurality of multi-function key buttons arranged thereon, and the touch screen includes a touch-sensitive panel and an LCD (Liquid Crystal Display) module.

[0004] Although the keyboard is very convenient for a complicated data input operation, it is too large in size to carry around. In addition, since the conventional keyboard has a straight structure, it is somewhat inconvenient for the user to use the keyboard in terms of ergonomics and biotechnology, thus fatiguing the wrists of the user. Further, as to the keypad mounted on the mobile communication terminal, it is very inconvenient for the user to perform a complicated data input operation using the keypad, because the keys themselves are small, and the keypad has a small number of multi-function key buttons.

[0005] When used as a data input device for inputting simple data (e.g., numeric data for dialing) for voice communication, the keypad is not so inconvenient to use. Recently, however, the mobile communication terminal is frequently used for image communication and Internet communication (including E-mail transfer) as well as voice communication. In particular, many mobile subscribers enjoy a chatting service during the image communication, which is expected to become more popular in the near future. For the Internet communication and the chatting service, the user is required to perform the complicated data input operation at high speed. Therefore, there have been demands for a data input device useful to the complicated data input operation, particularly for mobile communication devices.

[0006] It is, therefore, the object of the present invention to provide a portable, foldable data input device useful for a complicated data input operation.

[0007] According to an aspect of the present invention, there is provided a portable, foldable data input device using a Bluetooth module.

[0008] According to another aspect of the present invention, there is provided a portable, foldable data input device suitable for a high-speed data input operation.

[0009] According to yet another aspect of the present invention, there is provided a portable, foldable data in-

put device with conical hinge means.

[0010] To achieve the above object, there is provided a portable, foldable data input device for use in a mobile communication terminal. The data input device includes a first housing having a first slope; a second housing having a second slope facing the first slope when the first and second housings are unfolded; and conical hinge means situated between the first and second housings, for coupling the first housing to the second housing.

[0011] Preferably, the conical hinge means comprises first and second side hinge arms facing each other, mounted on the first housing; and a center hinge arm coaxially interposed between the first and second side hinge arms, the center hinge arm being mounted on the second housing.

[0012] Preferably, the first side hinge arm has a truncated cone shape and the second side hinge arm has a cone shape. Preferably, the center hinge arm has a truncated cone shape.

[0013] Preferably, the first and second housings each have at least one rubber leg, and each have a plurality of key buttons, as well as being unfolded about the hinge means in a V-shape.

[0014] Preferably, the first and second housings also have a touch pad, and an LCD (Liquid Crystal Display) module. It is also preferred that an angle given between a hinge axis of the conical hinge means and a reference line is equal to an angle between the first and second slopes and the reference line.

[0015] The above object, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a perspective view illustrating a portable, foldable data input device according to an embodiment of the present invention;

FIG. 2 is a plan view illustrating the portable, foldable data input device according to an embodiment of the present invention; and

FIG. 3 is a plan view illustrating an unfolded state of the portable, foldable data input device according to an embodiment of the present invention.

[0016] A preferred embodiment of the present invention will be described herein below with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

[0017] In the following description, a portable, foldable data input device with conical hinge means according to the present invention will be applied to a keyboard. The data input device can also be applied to a keypad and a touch screen. In addition, it is contemplated that the present invention can also be applied to a data output device as well as the data input device.

[0018] FIG. 1 is a perspective view of a portable, foldable keyboard 100 according to an embodiment of the present invention; FIG. 2 is a plan view of the portable, foldable keyboard 100; and FIG. 3 shows an unfolded state of the portable, foldable keyboard 100. Referring to FIGs. 1 to 3, the portable, foldable keyboard 100 includes a first housing 10, a second housing 20, and conical hinge means 30 for mechanically coupling the first housing 10 to the second housing 20. The first housing 10 and the second housing 20 both revolve on a hinge axis A of the conical hinge means 30.

[0019] With respect to hinge axis A, first housing 10 has a side adjacent the hinge 30 having a first slope 12 which is inclined at a predetermined angle θ to a reference line L. The second housing 20 has a side adjacent the hinge 30 having a second slope 22 which is also inclined at the same angle θ to the reference line L. An angle given between the hinge axis A of the conical hinge means 30 and the reference line L is equal to the angle between the first and second slopes 12 and 22 and the reference line L. The conical hinge means 30 includes side hinge arms 31 and 33, and a center hinge arm 32 interposed between the side arms 31 and 33. Preferably, the side hinge arms 31 and 33 are mounted on the first housing 10, and the center hinge arm 32 is mounted on the second housing 20. It is also contemplated, however, the side hinge arms 31 and 33 can be mounted on the second housing 20 and the center hinge arm 32 can be mounted on the first housing 10. The side hinge arm 31 mounted on one end of the conical hinge means 30 has a truncated cone shape, and the side hinge arm 33 mounted on another end of the conical hinge means 30 has a cone shape. In addition, the center hinge arm 32 interposed between the side hinge arms 31 and 33 has a truncated cone shape. The conical hinge means 30 according to the present invention includes two side hinge arms 31 and 33 and one center hinge arm 32, by way of example only. As best seen in FIG. 3, the conical hinge permits the keyboard 100 to open in a V-shape, which is ergonomic and reduces the incidence of fatigue in the wrists and hands of the user.

[0020] The first and second housings 10 and 20 are both constructed in the form of a flat board. The first housing 10 has a plurality of key buttons 11 arranged thereon, and the second housing 20 also has a plurality of key buttons 21 arranged thereon. As another example, the first and second housings 10 and 20 may have a touch screen in place of the key buttons 11 and 21. As further another example, a selected one of the housings 10 and 20 may have the key buttons, while the other housing has the touch screen. In addition, the present invention can also be applied to a data output device as well as the data input device. In this case, for example, either or both of the first and second housings 10 and 20 may have an LCD module as a data output device.

[0021] The first and second housings 10 and 20 each have at least one or more rubber legs R1-R3 to provide a friction force between the housings and a surface upon

which the data input device is placed.

[0022] Preferably, the data input device is wirelessly connected to a main body of the mobile communication terminal. In the embodiment of the present invention, radio communication between the first and second housings 10 and 20, and radio communication between the housings and the main body of the mobile communication terminal (not shown) are performed by a Bluetooth module, which is typically used for local radio communication. To this end, the first and second housings 10 and 20 include the Bluetooth module. Alternatively, the first housing 10 can be electrically connected to the second housing 20 via the hinge means 30 using a known flexible printed circuit board (PCB). However, it is preferable to wirelessly connect the first housing 10 to the second housing 20 using the Bluetooth module in order to prevent possible interference which may occur due to rotation of the housings 10 and 20. By connecting the first housing 10 to the second housing 20 using the Bluetooth module, it is possible to easily assemble the data input device. It is also contemplated that keyboard 100 can be connected by wire to the mobile communication terminal.

[0023] The user may fold the keyboard 100 to carry it in a pocket or a bag, since the keyboard 100 occupies a small space when folded. In addition, since the keyboard 100 according to the present invention preferably employs the Bluetooth module, it is possible for the user to use the keyboard 100 at a distance from the main body of the mobile communication terminal.

[0024] As described above, the first and second housings having the slopes facing each other are coupled using the conical hinge means, so that it is possible to unfold the keyboard in the V-shape, thus making it possible for the user to use the keyboard conveniently in terms of ergonomics and biotechnology. Further, the user can carry the keyboard by folding it. Therefore, the novel keyboard is suitable for the complicated data input operation required in the mobile communication terminal.

Claims

1. A portable, foldable data input device for use with a mobile communication terminal, the device comprising:

a first housing having an edge defining a first slope;
a second housing having an edge defining a second slope facing the first slope when the first and second housings are unfolded; and
conical hinge means situated between the first and second housings, for coupling the first housing to the second housing.

2. The device as claimed in claim 1, wherein the con-

ical hinge means comprises:

first and second side hinge arms facing each other, mounted on the first housing; and a center hinge arm coaxially interposed between the first and second side hinge arms, the center hinge arm being mounted on the second housing.

3. The device as claimed in claim 2, wherein the first side hinge arm has a truncated cone shape and the second side hinge arm has a cone shape. 5
4. The device as claimed in claim 3, wherein the center hinge arm has a truncated cone shape. 10
5. The device as claimed in one of the claims 1 to 4, wherein the first and second housings each have at least one rubber leg and/or are constructed in a form of a flat board. 15
6. The device as claimed in one of the claims 1 to 5, wherein the first and second housings each have a plurality of key buttons. 20
7. The device as claimed in one of the claims 1 to 6, wherein the first and second housings are unfolded about the hinge means in a V-shape. 25
8. The device as claimed in one of the claims 1 to 7, wherein the first and second housings have a touch pad. 30
9. The device as claimed in one of the claims 1 to 8, wherein the first and second housings have an LCD (Liquid Crystal Display) module. 35
10. The device as claimed in one of the claims 1 to 9, wherein an angle between a hinge axis of the conical hinge means and a reference line is equal to an angle between the first and second slopes and the reference line. 40

45

50

55

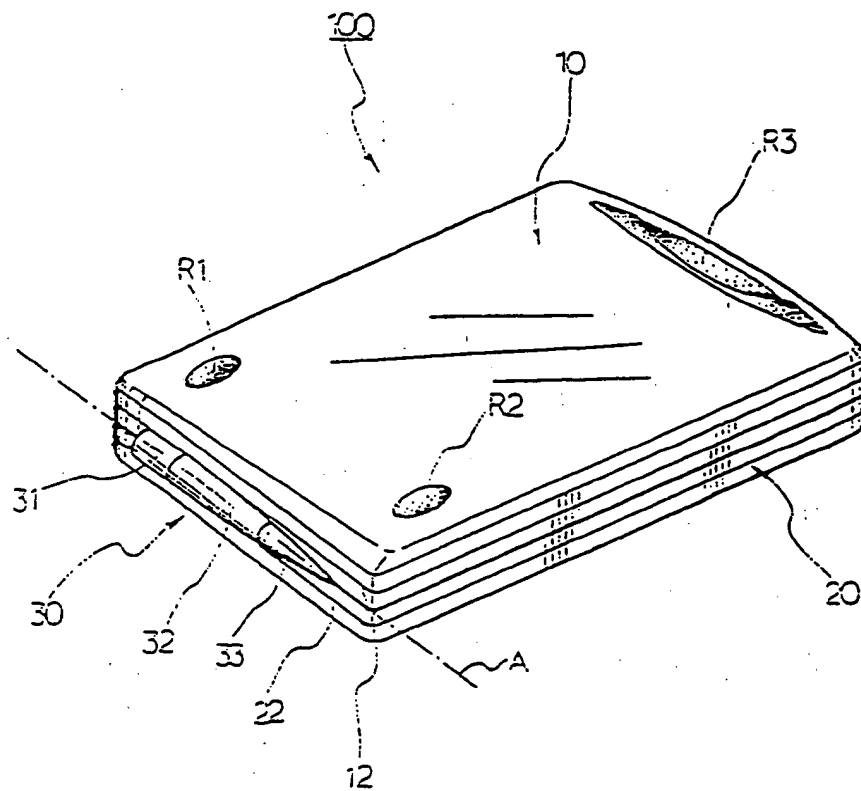


FIG. 1

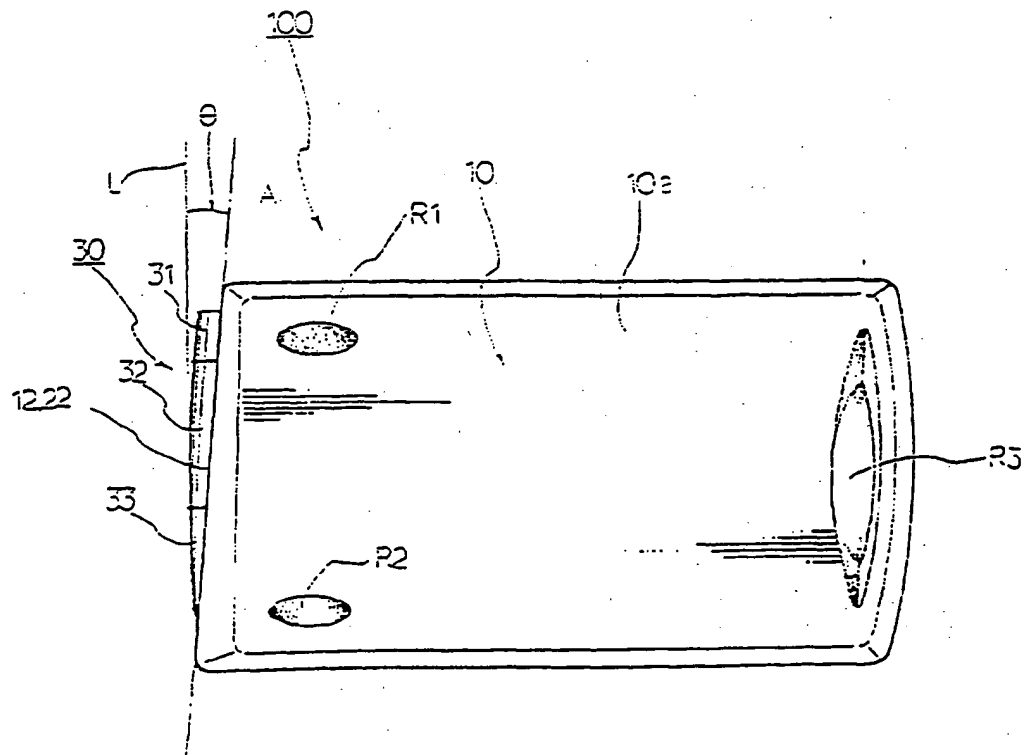


FIG. 2

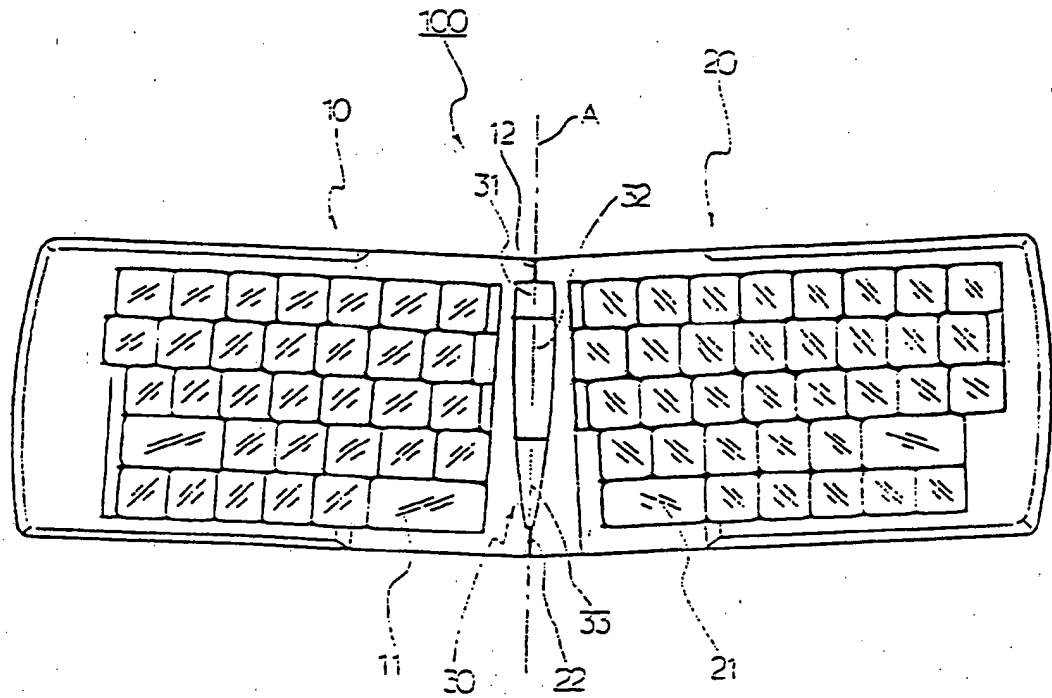


FIG. 3



European Patent Office

Office européen des brevets



EP 1 202 532 A3

(12)

EUROPEAN PATENT APPLICATION

21.05.2003 Bulletin 2003/21

(51) Int Cl.7: **H04M 1/02**

02.05.2002 Bulletin 2002/18

(21) Application number: 01125655.9

(22) Date of filing: 26.10.2001

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 26.10.2000 KR 2000063112

Applicant: SAMSUNG ELECTRONICS CO., LTD.
Suwon-City, Kyungki-do (KR)

c/o Samsung El.Co.Ltd.Int.Prop.Team
Suwon-city, Kyungki-do, 442-742 (KR)

**Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)**

communication terminal

(57) A portable, foldable data input device for use with a mobile communication terminal. The data input device includes a first housing having an edge defining a first slope; a second housing having an edge defining a second slope facing the first slope when the first and second housings are unfolded; and conical hinge

means situated between the first and second housings, for coupling the first housing to the second housing. The conical hinge means comprises first and second side hinge arms facing each other, mounted on the first housing; and a center hinge arm coaxially interposed between the first and second side hinge arms, the center hinge arm being mounted on the second housing.

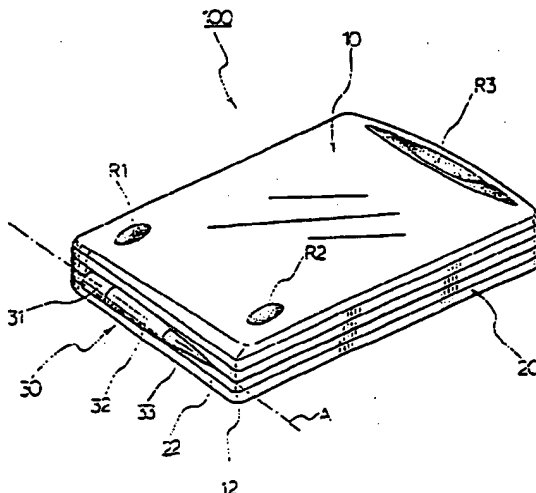


FIG. 1

EP 1 202 532 A3

Printed by Jouve, 75001 PARIS (FR)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 5655

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 941 648 A (ROBINSON ROBERT J ET AL) 24 August 1999 (1999-08-24)	1,6,7,10	H04M1/02
Y	* column 4, line 10 - line 53; claim 1; figures 6,7 *	5,8,9	
A	---	2-4	
Y	US 5 949 643 A (BATIO JEFFRY) 7 September 1999 (1999-09-07)	5,8,9	
A	* column 2, line 14 - line 51; figure 1 * * column 3, line 15 - line 21 * * column 5, line 20 - line 32 * * column 8, line 24 - line 32 *	10	
A	EP 1 005 262 A (NOKIA MOBILE PHONES LTD) 31 May 2000 (2000-05-31) * column 3, line 7 - column 12, line 60; figures 1-14 *	1-4	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04M G06F H01H
A	US 5 212 473 A (LOUIS WILLIAM M) 18 May 1993 (1993-05-18) * column 1, line 14 - column 8, line 55; figures 1,5 *	1,6-10	
A	US 5 905 796 A (JUNG JONG-GAB) 18 May 1999 (1999-05-18) * abstract; figure 4 *	2	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 April 2003	Examiner Ayala Perriello, M-P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

FP0 FORM 1503 03 02 (PUB/CI.1)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 5655

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-04-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5941648 A	24-08-1999	EP 0996051 A2	26-04-2000
US 5949643 A	07-09-1999	WO 0055704 A2	21-09-2000
		AU 3358099 A	04-10-2000
		TW 472204 B	11-01-2002
		US 6081207 A	27-06-2000
		EP 1222514 A2	17-07-2002
EP 1005262 A	31-05-2000	FI 982564 A	27-05-2000
		EP 1005262 A2	31-05-2000
		US 6308377 B1	30-10-2001
US 5212473 A	18-05-1993	AU 1320392 A	15-09-1992
		CA 2104587 A1	22-08-1992
		EP 0572487 A1	08-12-1993
		WO 9214612 A1	03-09-1992
US 5905796 A	18-05-1999	KR 127700 Y1	02-11-1998
		KR 141099 Y1	15-05-1999
		AU 695133 B2	06-08-1998
		AU 6569496 A	27-03-1997
		CA 2185835 A1	20-03-1997
		CN 1159136 A ,B	10-09-1997
		EP 0765063 A2	26-03-1997
		JP 2796275 B2	10-09-1998
		JP 9130462 A	16-05-1997
		RU 2121050 C1	27-10-1998
		US 5697124 A	16-12-1997

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.